

## LOG HORSE WITH CHAINSAW HOLDER



Fig 3. Carefully lower the chainsaw bar into position between the two solid blocks in the pivot clamp and ensure a 2 cm gap between the body of the chainsaw and the clamp. Make sure that the bar is approximately 90 degrees to the clamp and well clear of the chain before tightening the bolt. Once tightened, test the arc of travel to make sure that the chain bar does not touch any part of the sawbench.

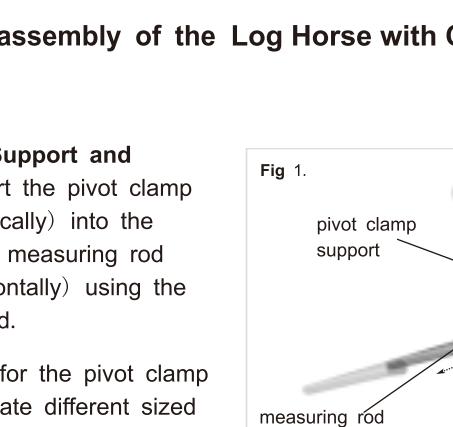


Fig 4a. Position the chainsaw bar guard around the top rod of the pivot clamp. Securely tighten the bar guard with bolt and nut provided

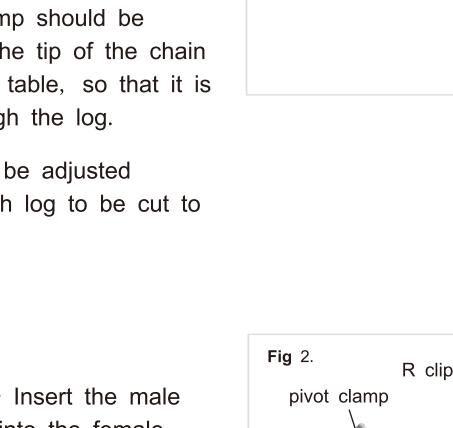


Fig 4b. Slide the guard backwards and forwards as necessary to a position in which the guard is well clear of the chain. Tighten the bolt. Re-check for clearance.

The Log Horse is now ready for use.

